EXIT

NEW YORK CITY COMPLIANT RECESSED EDGELIT ALUMINUM EXIT SIGN

STANDARD | *OPTIONAL*

ILLUMINATION

- *Ultra bright, energy efficient, long life Red LEDs.*
- *UV-stabilized, ultra-clear acrylic edgelit panel provides consistent, uniform illumination.*
- *Double face utilizes factory installed silver or white mylar background panel.*
- *New York City compliant 8" EXIT letters.*

ELECTRICAL

- *Dual 120/277 voltage standard.*
- *Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.*
- *4.8V Long life, maintenance-free, rechargeable NiCd battery (EM models only).*
- *Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.*
- *Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.*

MOUNTING

- *Compatible with drywall or drop ceiling mount installations. Bar hangers included.*
- *Wall mount capability optional.*

HOUSING

- *Premium-grade, extruded aluminum housing.*
- *Extruded aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance. Available in optional black or white powder-coated finishes.*
- *Self-adhesive Chevron appliques and guide template provided for directional indication.*

OPTIONS

- *WM: Allows for the unit to be wall recessed mounted.*
- *SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.*
- *SPV: UL Listed for 208/220/240 Volt, 50/60Hz.*

WARRANTY / LISTING

- *Five year warranty on all electronics and housing. Battery prorated for five years.*
- *Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.*
- *UL Listed for damp locations (0°C – 50°C).*
- *Certified to CEC under Title 20 Regulations.*
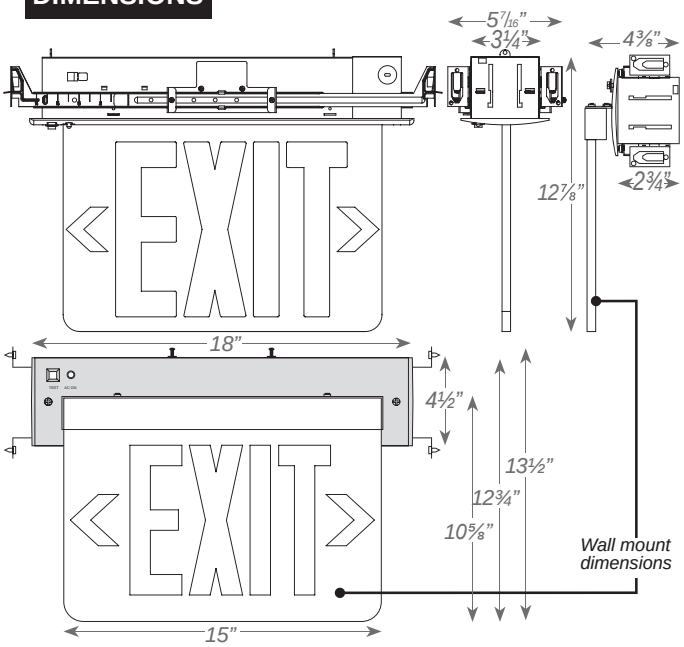
DIMENSIONS